

Plan 11 Standard Bat House

SUPPLIES NEEDED:

WOOD:

- 4' x 4' x 1/2" CDX EXTERIOR PLYWOOD
- 4' x 8' x 3/8" CDX EXTERIOR PLYWOOD
- 1" x 8" x 8' BOARD
- 1" x 8" x 4' BOARD

OTHER TOOLS AND SUPPLIES NEEDED:

SCREW DRIVER (PREFERABLY ELECTRIC)

1 - 1/4" LONG WOOD OR GALVANIZED DRYWALL SCREWS (1LB). SCREWS ARE REQUIRED FOR ASSEMBLY.

CAULKING: TUBE OF BLACK ROOF CEMENT

CAULKING GUN FOR ABOVE

BLACK, MATT FINISH, DARK BASE, SOLID COLOR ACRYLIC EXTERIOR STAIN (ONE QUART)

BLACK ROLLED ROOFING: 25 - 1/2" x 9 - 3/4"

STAPLE GUN WITH 3/8" STAPLES

UTILITY KNIFE WITH SNAP-OFF BLADES

FIBERGLASS WINDOW SCREENING: 22" x 6"

ASSEMBLY INSTRUCTIONS:

The bat box plan has been successful in attracting nursery colonies of Little Brown and Big Brown Bats.

Bat roosting requirements are strict, necessitating adherence to construction details.

1. Cut out parts as illustrated.

2. Apply a bead of caulk to front edges of box SIDES & attach box FRONT with 6 - 8 screws per side. Clean excess caulk that squeezes out.

3. Score inside of front and sides with utility knife to roughen. Also score bottom 4-1/2" on outside of box FRONT below vents. Make horizontal scratches 1/4" apart. While the knife is out, score both sides of all ROOSTING BAFFLES and the interior side of box BACK. These are landing/roosting footholds and are VERY IMPORTANT. Do not use saw to roughen, this will cause plywood to delaminate.

LANDING PLATE AND INTERIOR SURFACES MUST BE ROUGHENED.

4. Attach 2 BAFFLE SPACERS to inside front corners with two screws each, and screwed in from front of box. Space about 2 inches from top of box FRONT with 3/4" dimension to sides. Lay assembled parts FRONT down on table or floor.

5. Attach SHORT ROOST BAFFLE to spacers about 1" down from top of sides. Use 2 screws on each side.

6. Attach two BAFFLE SPACERS into new corners made by short roost baffle. Use 2 screws on each side.

7. Attach LONG ROOST BAFFLE to spacers about 1" down from top of sides. Use two screws on each side.

8. Repeat installation of BAFFLE SPACERS and ROOST BAFFLES, alternating short and long roost baffles until six ROOST BAFFLES are in. The last two baffle spacers should be attached to previously affixed BAFFLE and box SIDES for stability.





9. Caulk back edges of box SIDES and attach box BACK with scored side in. Do not caulk inside vent areas. The BACK should extend 2" above top of SIDES. Use 6-8 screws on each side. Clean excess caulk that should squeeze out.

10. Center ROOF SUPPORT on inside top of box FRONT. Align angled edge with top edge of FRONT and SIDES. Attach with 3 screws through the box FRONT.



11. Center ROOF SUPPORT on inside and 2" below top of box BACK. Align angled edge with top edges of SIDES. Attach with 3 screws through box BACK.

12. Apply bead of caulk to top of SIDES, FRONT, two ROOF SUPPORTS and angled back edge of ROOF.

13. Lay ROOF in position and attach with at least three screws on each SIDE, FRONT and BACK. Clean excess caulk.

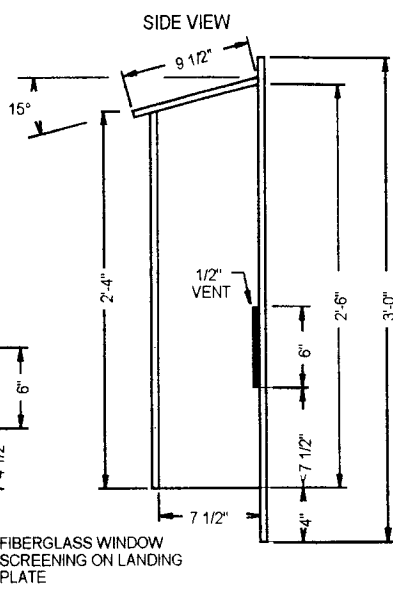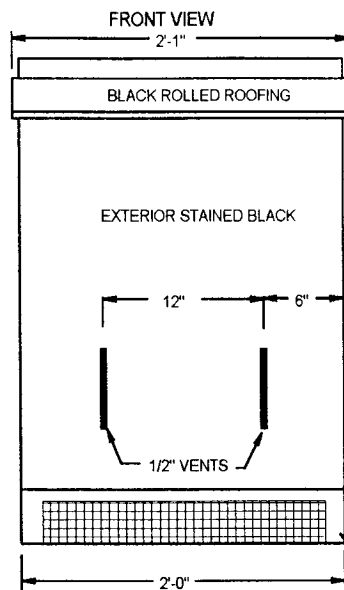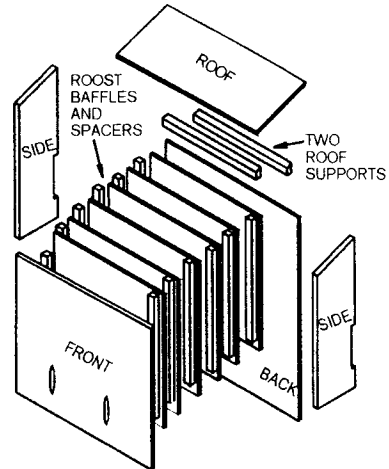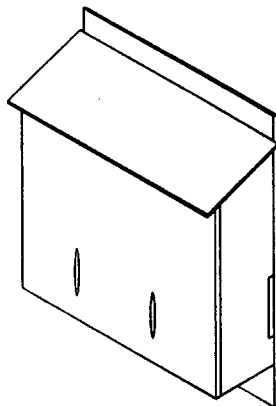

BOTTOM VIEW

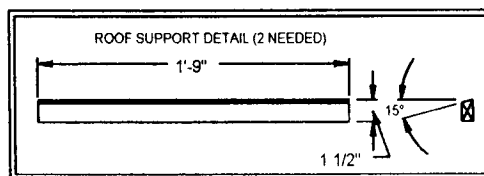

SIDE VIEW OF INTERIOR

